




Model RCF-SD
Filtered Roof Supply Fan
Side Discharge

- Sturdy Heavy Gauge Galvanized Steel Housing.
- Hood Designed to Provide Unrestricted Airflow and Maximum Weather Protection.
- One Inch Washable Aluminum Filters.
- Blower is a Double Width, Double Inlet (DWDI) Forward Curve Centrifugal Type.
- Entire Fan and Motor Assembly is Mounted on Rubber Mounts to Prevent Noise Transmission into the Building.
- Fan Capacity Ratings Based on Tests Made in Accordance With AMCA Std 211

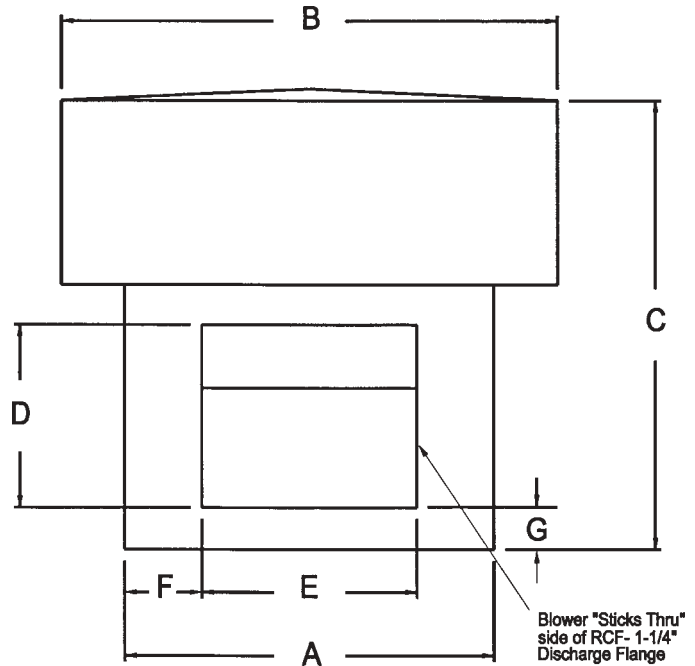

ROMLA VENTILATOR CO.
9668 Heinrich Hertz Drive • Unit D
San Diego, California 92154
Ph (619) 946-1224 Fax (619) 946-1227

Abbreviation for Accessories

- CF-8** -Type CF roof curb 8" high
BD -Backdraft Damper
MBD -Motorized damper 1/115v
DCS -Disconnect switch NEMA 1

FAN SIZE	A	B	C	D	E	F	G	NOMINAL FILTERS	WT.
9	24-3/8	32-3/8	26-5/8	10-1/4	11-3/4	6-9/32	3-5/8	(4) 10 X 20	240
10	28-3/8	38-1/2	29-3/4	11-3/8	13-1/8	7-5/8	3-5/8	(4) 12 X 24	265
12	32-3/8	42-5/8	36-9/16	13-7/8	15-5/8	8-3/8	3-5/8	(4) 16 X 25	305
15	32-3/8	42-5/8	39-1/8	15-7/8	18-5/8	6-7/8	3-5/8	(4) 16 X 25	350
18	36-3/8	48-5/16	46-1/8	18-7/8	21-7/8	7-1/4	3-5/8	(8) 20 X 15	475
20	44-3/8	64	59-5/8	24-3/4	24-3/4	9-13/16	5	(4) 16 X 25 (4) 20 X 20	750

SPECIFICATIONS

QTY.	MODEL	TAG	CFM	SP	RPM	OV	HP	VOLTS	PH	HZ	TYPE	OPTIONS

PROJECT: LOCATION: SUBMITTED BY: DATE:	CONTRACTOR: ENGINEER: APPROVED BY: DATE:
---	---