




## Model TB Belt Drive Tubeaxial Fan

- Cast aluminum non-sparking airfoil propeller
- Heavy gauge all welded housing with steel angle end flange rings for superior strength
- Variable pitch drives to 7-1/2 Hp-Adjustable for systems RPM. Belts sized for 165% driven Hp
- Industrial duty totally enclosed fan cooled (TEFC) or explosion proof ball bearing motors for years of trouble free operation.
- Self-aligning pillow block bearings
- Adjustable motor base provided for tightening the fan belts
- Extended lube lines with grease fittings
- Tested and rated in accordance with AMCA standard 211

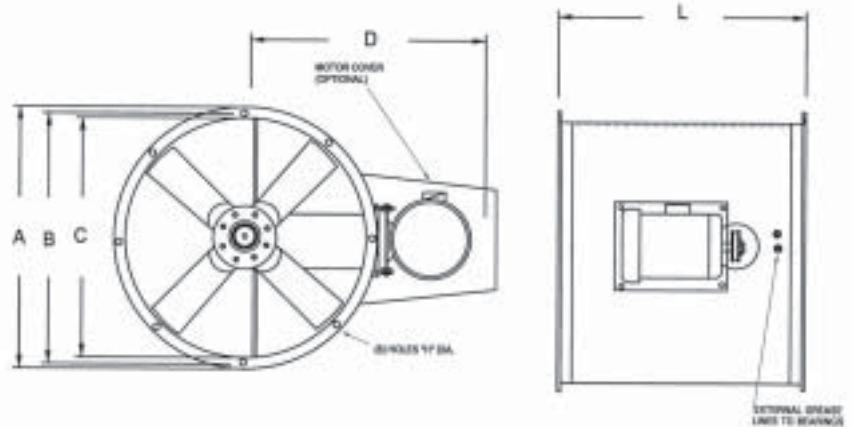

**ROMLA VENTILATOR CO.**  
**9668 Heinrich Hertz Drive • Unit D**  
**San Diego, California 92154**  
**Ph (619) 946-1224 Fax (619) 946-1227**

### Abbreviation for Accessories

- OMR** -Optional mouting arrangement
- BG** -Belt guard
- MC** -Motor cover
- AD** -Access door
- IG** -Inlet guard
- OG** -Outlet guard
- CF** -Companion flanges
- SC** -Special coating
- VI** -Vibration isolators
- MB** -Mounting brackets

DIMENSIONS									
SIZE	A	B	C	D	L	H	GA	APPROX WT	
24	27-3/16	25-7/8	24	26	22	7/16	12	210	
30	34-3/16	32-3/8	30	29-1/4	24	7/16	12	263	
36	40-3/16	38-3/8	36	33-3/4	26	7/16	12	361	
42	46-3/16	44-3/8	42	37-1/4	32	7/16	10	450	
48	52-3/16	50-3/8	48	40-1/2	36	7/16	10	625	
54	58-3/16	56-3/8	54	47-1/4	37-1/2	7/16	10	675	
60	64-3/16	62-3/8	60	50-3/4	40	7/16	10	1550	

### SPECIFICATIONS

MARK	MODEL	NO REQ'D	HP	SP	FAN RPM	VOLTS	HZ	TYPE	CFM	ACCESSORIES

<b>PROJECT:</b> <b>LOCATION:</b> <b>SUBMITTED BY:</b> <b>DATE:</b>	<b>CONTRACTOR:</b> <b>ENGINEER:</b> <b>APPROVED BY:</b> <b>DATE:</b>
---	---